


iLA Wi-Pin & Prox

Wireless Pin & Prox Door Controller



FEATURES

- Used with iLA Wi -Plus & iLA Wi -Enterprise Controller
- Monitors and Controls 1 Door
- Supports Wireless or RS485 Networks
- Up to 20000 Users (Card/Fob, PIN) depending on controller
- Pin or prox, Pin & Prox
- Can Use ACT, HID & Paxton Cards/Fobs
- 128 User Groups, 128 Time Zones
- Challenge facility
- Local Proximity Reader (Clock & Data)
- Tamper protection
- Tamper Output extendable to Intruder Panel

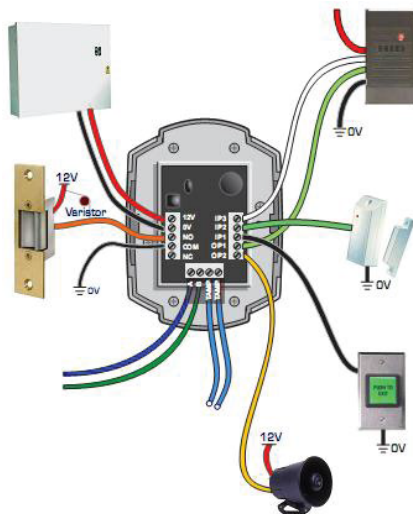

ADDITIONAL FEATURES

- Easy Programming via iLA Software
- Standard, Toggle & Manager Users
- Intruder & Fire Alarm Interface
- Interlock, Anti-Tailgate
- Keypad Backlit
- 1 x 5amp Relays 240vac
- 3 Inputs - 1 Programmable
- 2 Outputs - 1 Programmable
- Key Programmable Features:
 - Door Timers
 - Timed Actions
 - Door Options
 - Alarm Options
 - User Groups
 - Door Groups
 - Time Zones
 - Number of PIN code Digits
 - Programming Code
- Robust Polycarbonate Housing
- Stainless Steel Keys

- Mounts onto standard Electrical Patress box
- Flush mounts using collar supplied
- 2 Year Warranty.

SPECIFICATIONS

Current consumption	100mA
Current consumption with load (max)	140mA
Relay Contact Rating	5 Amps /240V ac
Operating Temperature	-20C to +60 C
Moisture Resistance	IP 67
Dimensions:	
- Flush Mount	W. 87mm D. 21mm H. 119mm
- Surface Mount	W. 87mm D. 35mm H. 119mm



2480 South 3850 West, Suite B
Salt Lake City, UT 84120
(866) 975-0101 • (866) 975-0404 fax
www.transmittersolutions.com

All items are trademarks of their respective holders.

To have your fax number removed from future specials, please call Removal Services - 800-915-2571 ext. 47540 or fax to 866-975-0404.